


LIFTING LOOP

Most economical lifting units for this system. Manufactured from flexible wire rope and tagged with a color code to match the capacity of the anchors. For tension only - limited to 45 degrees from vertical. Galvanized cable loop with mill finished threaded stud.

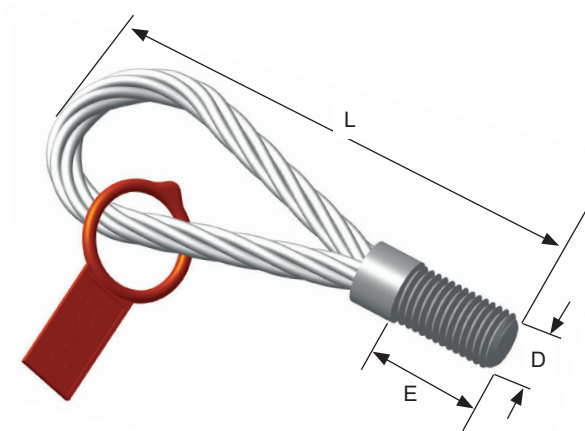


PART NUMBER	COLOR CODE	SWL TENSION (LBS)	THREAD SIZE (D)	THREAD LENGTH (E)	LENGTH (L)
LHLL005	Orange	1000	Rd12x1.75	3/4"	6-1/8"
LHLL008	White	1600	Rd14x2.0	7/8"	6-1/8"
LHLL012	Red	2400	Rd16x2.0	1"	6-1/8"
LHLL016	Pink	3200	Rd18x2.5	1-1/8"	7-1/2"
LHLL020	Light Green	4000	Rd20x2.5	1-1/4"	8-1/2"
LHLL025	Dark Grey	5000	Rd24x3.0	1-9/16"	10"
LHLL040	Emerald Green	8000	Rd30x3.5	2-3/16"	12"
LHLL063	Light Blue	12600	Rd36x4.0	2-5/8"	13-1/3"
LHLL080	Light Grey	16000	Rd42x4.5	3-1/8"	17"
LHLL125	Yellow	25000	Rd52x5.0	3-3/4"	19"

Safe working loads based on approximate 5:1 Safety Factor.

Lifting Loop With Pressure Plates

Most versatile lifting units for Waved Tail and Flat Steel Plate Anchors. Tagged with a color code to match the capacity of the anchors. Retain the flexibility of the regular Lifting Loops w/o the need for Distribution Basins when used in extreme shear conditions. Plated.

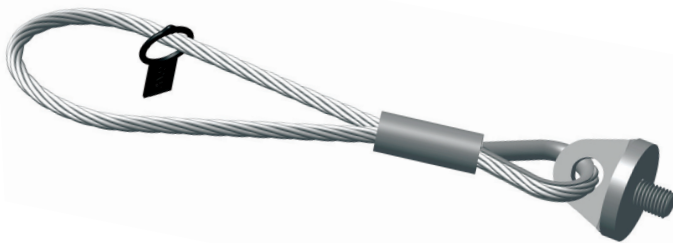

ITEM CODE	COLOR CODE	SWL (LBS)	THREAD SIZE
LHLP005	Orange	1000	Rd12
LHLP008	White	1600	Rd14
LHLP012	Red	2400	Rd16
LHLP016	Pink	3200	Rd18
LHLP020	Light Green	4000	Rd20
LHLP025	Dark Grey	5000	Rd24
LHLP040	Emerald Green	8000	Rd30
LHLP063	Light Blue	12600	Rd36
LHLP080	Light Grey	16000	Rd42
LHLP125	Yellow	25000	Rd52

Safe working loads based on approximate 5:1 Safety Factor.